

CONTRACTOR TIP

by Mr. Corey Zussman of Pepper Construction

CMU substrates are more challenging to coat because of the CMU's porosity. As a result, the liquid material will typically take one or two additional coats to achieve proper thickness.




Gaps in the membrane @ the pintle.



Bubbles coming from the gaps.

We recently started pre-coating the masonry pintles, taking the time to detail each penetration before the spray or roll installation. We saw a substantial benefit to the installation, with less failure and rework.

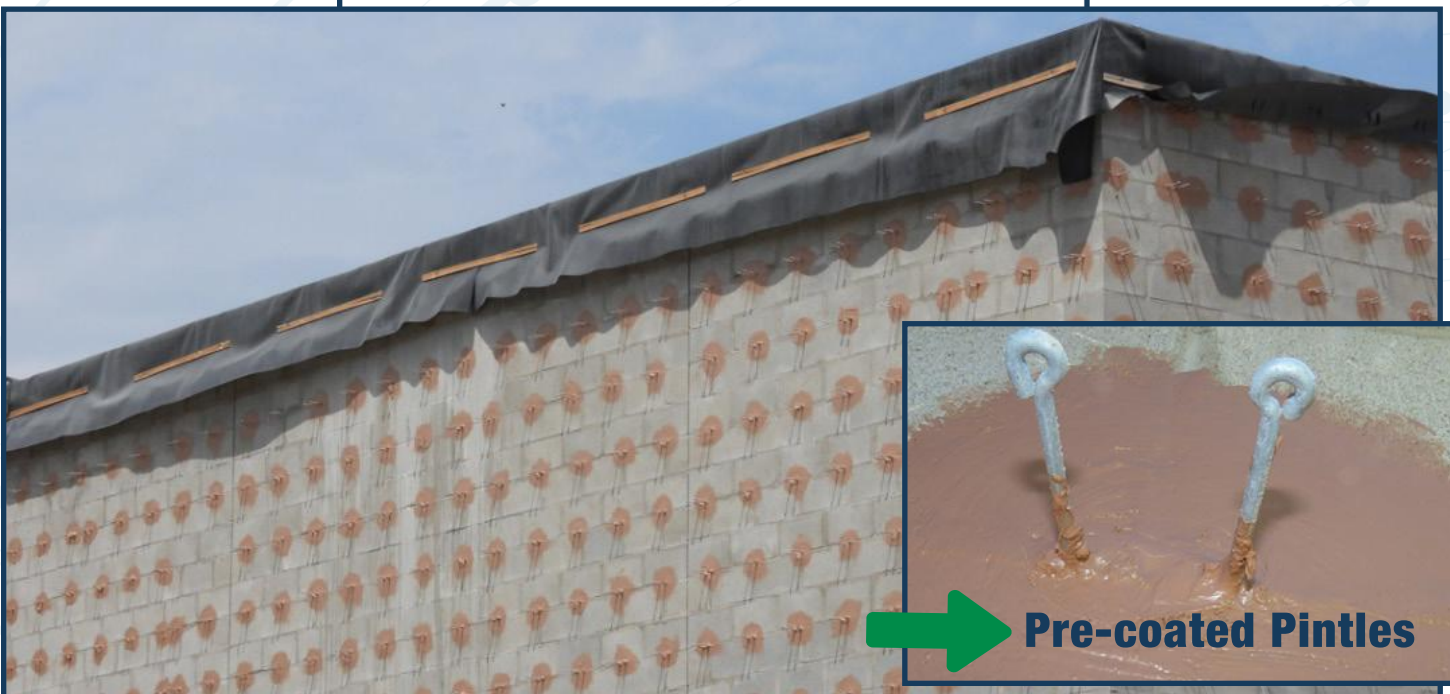

Pre-coated Pintles

Make sure the pintles are straightened before the pre-coating process!